

GLORIA®**1/2 kg****F 1 / F 2**

Car Extinguishers

portable**stored pressure****powder**

**Design,
Technology
& Safety
in perfection!**

GLORIA F 1 / F 2 - designed for one hand operation, simultaneously to carry and trigger

Large handle allows secure handling operation (bearing, aiming and triggering by one hand) in every situation. Rounded edges as specified by the automotive industry.

Sturdy handle with clearly marked operating elements:

- 1** - Securing key (yellow),
- 2** - Extinguishing key (black).

GLORIA F 1 / F 2 – form of the product resulting from the function.

Fire hazard is a risk which couldn't be fully avoided. The only thing that remains is to minimize fire risk and prepare for what may eventually happen - lots of fires can be successfully quenched in the development phase. Protect Your family, home and property with a GLORIA Fire extinguisher.

GLORIA powder fire extinguishers F 1 / F 2 can be used in the following fire classes:

Type	A	B	C	MED
F 1 GM	8	34	•	—
F 1 G	8	34	•	—
F 2 G	13	89	•	⚙️
F 2 GM	13	89	•	⚙️

Areas of use:

- Cars
- Trucks
- Campers
- RVs
- Motor boats and yachts
- Workshops
- Households
- Shipping companies

Ergonomic and intuitive fire extinguishers design, necessary when speed and ease of operation are key features (especially in stress situations).

Smallest external dimensions thanks to special valve and container construction.

Devices F 2 GM / F 2 G / F 1 G equipped with car holder and security strap - in standard.

F 1 GM Exclusive: Easily housing due to stable security case where a seat attachment is not possible or not desired.

F 2 GM / F 2 G are ideal for ADR transport.

High extinguishing power and long duration of extinguishing blast, at any time.


GLORIA F 2 GM

GLORIA®**1/2 kg****F1/F2**


Car Extinguishers

portable**stored pressure****Product and performance features**

- Fire extinguisher container made from high quality steel, coated outside with weather-resistant, 100% polyester resin covering.
- Coating without polluting substances such as Cadmium, TGIC, etc.
- High strength brass valve body – strong, sturdy, stable.
- F 1 GM / F 2 GM - it is always possible to check pressure optically by integrated pressure gauge and check valve.
- Valve case made of special durable plastic.
- Approved to use on electrical installations up to 1000 V at minimum distance 1 m.
- Labelling with up-to-date quality silkscreening.
- Refillable after use, for many times.
- Each fire extinguisher delivered in a separate cardboard box.

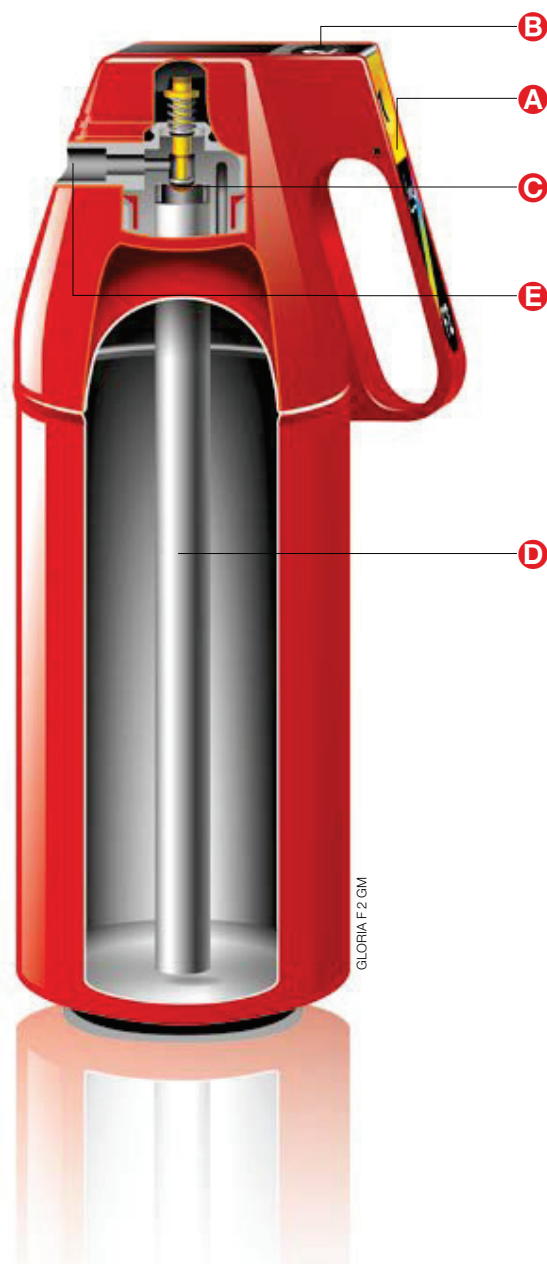

- Push the **yellow button A** - extinguisher is ready to use.
- Push the **black button B** the **valve C** opens.
- Extinguishing agent enters the **diaphragm D** from where it goes to the **nozzle E**.



Type	Model	PN	Weight of charge unit [kg]	Extinguishing agent	Qty of exting. agent [kg]	Propellant gas	Discharge time [s]	Throw [m]	Working temperature [°C]	Bracket H/W/D, Ø [mm]
F 1 GM Exclusive	PG 1 L	001413.1865	≈2,2	ABC Powder	1	nitrogen	8	4	-30 / +60	180* / 280* / 100*, 90
F 1 G	PG 1 L	001403.0000	≈1,6	ABC Powder	1	nitrogen	8	4	-30 / +60	270 / 95 / 124, 90
F 2 G	PG 2 L	001863.0000	≈3,5	ABC Powder	2	nitrogen	13	4	-30 / +60	322 / 115 / 145, 110
F 2 GM	PG 2 L	001873.0000	≈3,5	ABC Powder	2	nitrogen	13	4	-30 / +60	322 / 115 / 145, 110

GLORIA F 1 GM Exclusive / F 1 G / F 2 G / F 2 GM - technical data, * - Dimensions of Safety-Box

*Subject to technical changes

UTC CCS MANUFACTURING POLSKA SP. Z O.O.
 KOLEJOWA 24, 39-100 ROPCZYCE
 POLAND

PHONE +48 17 22 10 206
 FAX +48 17 22 10 241
 pfx@fs.utc.com



**United
Technologies**

Climate | Controls | Security